




## LINK BELT BEARING LTD

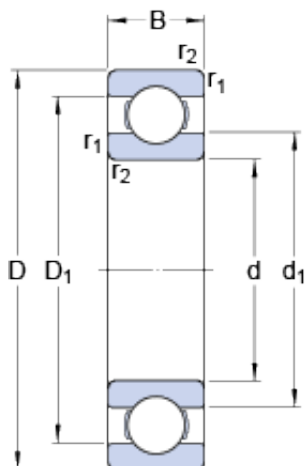

45 mm x 58 mm x 7 mm SKF 61809 ITALY  
Bearing 45 × 58 × 7

Bearing No. 61809

61809 Bearing 2D drawings and 3D CAD models

Size	58x45x7 mm
Bore Diameter	58 mm
Outer Diameter	45 mm
Width	7 mm
d	45 mm
D	58 mm
B	7 mm
d <sub>1</sub>	49.1 mm
D <sub>1</sub>	53.9 mm
r <sub>1,2</sub> - min.	0.3 mm
d <sub>a</sub> - min.	47 mm
D <sub>a</sub> - max.	56 mm
r <sub>a</sub> - max.	0.3 mm
Basic dynamic load rating - C	6.6 kN
Basic static load rating - C <sub>0</sub>	6.1 kN
Fatigue load limit - P <sub>u</sub>	0.26 kN
Reference speed	22000 r/min
Limiting speed	14000 r/min
Calculation factor - k <sub>r</sub>	0.015
Calculation factor - f <sub>0</sub>	17
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



## LINK BELT BEARING LTD

Weight / Kilogram	0.047
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	45MM Bore; 58MM Outside Diameter; 7MM Outer Race Diameter; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	61809 J
Weight / LBS	0.1
Bore	1.772 Inch   45 Millimeter
Outside Diameter	2.283 Inch   58 Millimeter
Outer Race Width	0.276 Inch   7 Millimeter
bore diameter:	45 mm
static load capacity:	6.1 kN
outside diameter:	58 mm
precision rating:	Not Rated



## LINK BELT BEARING LTD

overall width:	7 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Open
outer ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	0.3 mm
snap ring included:	Without Snap Ring
maximum rpm:	14000 RPM
internal clearance:	C0
series:	61
dynamic load capacity:	6.63 kN
$d_1$	48.2 mm
$D_1$	53.92 mm
$r_{1,2}$ min.	0.3 mm
$d_a$ min.	47 mm
$D_a$ max.	56 mm
$r_a$ max.	0.3 mm
Basic dynamic load rating C	6.63 kN
Basic static load rating $C_0$	6.1 kN
Fatigue load limit $P_u$	0.26 kN
Calculation factor $k_r$	0.015
Calculation factor $f_0$	17
Mass bearing	0.04 kg