




LINK BELT BEARING LTD

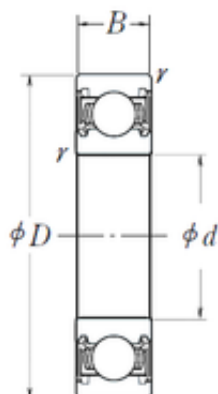

15 mm x 24 mm x 5 mm NSK 6802DD JAPAN
Bearing 15*24*5

Bearing No. 6802DD

6802DD Bearing 2D drawings and 3D CAD models

Size	15x24x5 mm
Bore Diameter	15 mm
Outer Diameter	24 mm
Width	5 mm
d	15 mm
D	24 mm
B	5 mm
C	5 mm
r min.	0,3 mm
da min.	17 mm
da max	17 mm
Da max.	22 mm
ra max.	0,3 mm
Weight	0,007 Kg
Basic dynamic load rating (C)	2,07 kN
Basic static load rating (C0)	1,26 kN
(Grease) Lubrication Speed	17 000 r/min
Category	Single Row Ball Bearings
Inventory	6.0
Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	0.008
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



LINK BELT BEARING LTD

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	15MM Bore; 24MM Outside Diameter; 5MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; C
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.nskamericas.com
Manufacturer Item Number	6802DD
Weight / LBS	0.01653
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	0.945 Inch 24 Millimeter
Bore	0.591 Inch 15 Millimeter
Outer Race Width	0.197 Inch 5 Millimeter
SRI	1.23
hidYobi	6802DD
LangID	1



LINK BELT BEARING LTD

D_	24
SREX	0.01
B_	5
da min	17
hidTable	ecat_NSRDGB
SRE	1.23
mass	0.007
GRS rpm	17000
ra	0.3
SRIX	0.01
D_a	22
SRIN	-0.01
C0	1.26
fo	15.8
SREN	-0.01
DE_	21.881
Prod_Type3	DGBB_SR_DD
DA_	2.381
bomp	0
Z_	14
yobi	6802DD
C_conv	2070
ALPHA_	0
SDM_	19.5
r	0.3
KBRG	6191
SBRG	18
DI_	17.119